




# AQUAFIX

# MILIEU®

## Aquafix Milieu presents GREASE TRAPS &

## Euromal®+ CATCH PITS

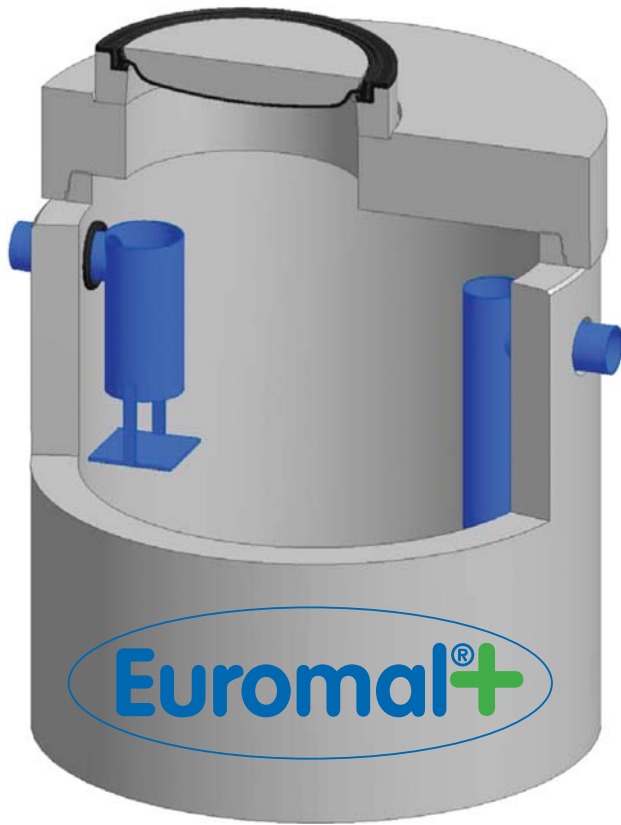

**NEN-EN 1825**

### BENEFITS:

- Extensive range of separators from 2 to 100 L/s
- Catch pits ranging from 200 to 60,000 L.
- Wide range of Euro (combined) models available
- Hydraulically optimized design
- Very high efficiency – far below statutory requirements
- High durability achieved using high-grade materials
- Quick and easy to position and install
- NEN EN 1825 compliant manufacture

### OPTIONS:

- Heavy-duty traffic covers
- HDPE inner linings
- Attachments (for increased installation depths)
- Flexible connectors
- Grease alarm
- Inspection manholes
- Inspection chambers

Following extensive research, Aquafix Milieu's developers have successfully launched a new range of grease traps, oil/fuel, coalescence, and parallel plate separators, and catch pits. This new Euromal®+ line is unrivalled on the European market. We have developed custom solutions for every wastewater management problem – small or large – available from stock.

The Euromal®+ line's performance and functionality has been tested and certified by the approved LGA TÜV-Rheinland inspection institute in Würzburg, Germany. These separators have also been CE approved.

We manufacture all our separators in our factory in the Netherlands from watertight sumps made of high-grade, reinforced monolithic concrete (concrete grade: C60/75, environmental category: XA3, exposure class: EA3). Watertight seals between the lower basin and the cover slab are achieved using a spigot-and-socket joint fitted with an SBR top ring (supplied). We fit separators with a BEGU cover rated for traffic category B.125 kN as standard. For a small additional charge, we can also supply D.400 kN-rated covers.

We supply separators with a high-grade, two-component inner coating and for a small additional charge, 3 mm HDPE inner linings (e.g. for chemical-resistant usage). We manufacture separator interiors from durable KOMO-certified PE. Our oil, fuel and coalescence separators are fitted with an LGA-tested automatic float valve.

Euromal®+ grease traps are manufactured according to European NEN EN 1825 standards with residual grease emissions of less than 25 mg/L in compliance with statutory minimum requirements.

Using Aquafix Milieu's hydraulically optimized design, we have succeeded in keeping levels far below the 25 mg/L requirement. For example, our 10 L/s grease trap has residual grease emission levels of less than 9 mg/L.

As you can see, Euromal®+ separators provide top quality and excellent performance.



TÜVRheinland®  
LGA



### CERTIFICATION:

- CE approval mark (EC conformity statement)
- KIWA certificate in compliance with BRL 5070
- LGA TÜV Rheinland performance and functionality statement

### APPLICATIONS:

- Restaurants, cafés and kitchens
- Hotels and conferencing facilities
- Hospitals and care homes
- Canteens
- Fish-processing businesses
- Meat-processing businesses
- Army bases and soup kitchens
- Bakeries
- Vegetable processors
- Food industry
- Pharmaceutical industry

*The Netherlands' largest  
separator manufacturer*

We are currently looking for dealers/resellers. Our sales manager speaks English and German.

P.O.Box 288, 3640 AG MIJDRECHT THE NETHERLANDS T: 0031-297-262929 F: 0031-297-261272 www.aquafix.eu