

WALL PENSTOCK



The Aquafix wall penstocks are used in surface water, sewer and process water pipeline systems. These penstocks are manufactured in our own factory from durable 1st class quality HDPE. Standard equipped with a non-rising spindle of stainless steel 316. The wall penstock consists of a vertical movable sliding plate which closes the supply, the watertightness is guaranteed by the use of an EPDM seal which is fitted in the sliding plate. In this way, the water pressure on both sides is blocked, the penstocks are tested and found suitable for a maximum operating water pressure of 1 to 5 McW. Our penstocks are manufactured with a round inlet-opening but also square-, rectangular- or egg- shaped is available on request. The basic version is suitable for wall mounting but optional they can also be supplied with a spigot. Depending the application of the penstock we are able to adjust the product materials on the characteristics of the liquid involved to guarantee the maintenance free functionality, i.e. by use of aggressive fluids. On request it is possible to customize production in many dimensions. This type of penstock is suitable for sealing horizontal pipelines.

Features and benefits:


- Manufactured out durable HDPE and SS 316
- Easy fitting
- Customized production on request
- Maintenance free

Options:

- Rising spindle, mountingset. T-key, actuators
- High pressure version up to 8 McW
- Square-, rectangular- or egg-shaped openings

Certificate:

- Aquafix Quality Certificate

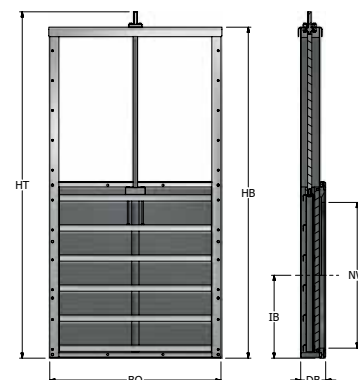

Type Aquafix	NW	BO	HB	HT	DB	IB	KG
665ASA0110	Ø 110	400	660	800	94	150	15
665ASA0125	Ø 125	400	660	800	94	150	17
665ASA0160	Ø 160	400	660	800	94	150	19
665ASA0200	Ø 200	400	660	800	94	150	21
665ASA0250	Ø 250	500	860	1000	104	250	23
665ASA0315	Ø 315	500	860	1000	104	250	25
665ASA0400	Ø 400	600	1060	1200	119	300	30
665ASA0500	Ø 500	700	1260	1400	114	350	60
665ASA0600	Ø 600	800	1460	1600	134	400	75
665ASA0700	Ø 700	900	1660	1800	134	450	90
665ASA0800	Ø 800	1000	1860	2000	144	500	100
665ASA0900	Ø 900	1100	2060	2200	144	550	145
665ASA1000	Ø 1000	1200	2260	2400	144	600	165

Dimensions in mm and weight in kilograms

Subject to changes

AQUAFIX MILIEU®

YOUR PARTNER FOR THE FUTURE



Mijdrecht

Laakdal

Netherlands:
AQUAFIX MILIEU BV
Genieweg 20
NL-3641 RH MIJDRECHT
T: +31 297 26 29 29
info@aquafix.nl

Belgium:
AQUAFIX BELGIUM BVBA
Dwarsstraat 6A
BE-2430 LAAKDAL
T: +32 13 66 83 03
info@aquafix.be

WWW.AQUAFIX.EU